As an auxiliary light source, it can decorate space and create atmosphere at the sametime


HyLight Your Venture !



HYLUM

LED LIGHTING

2 YEAR WARRANTY

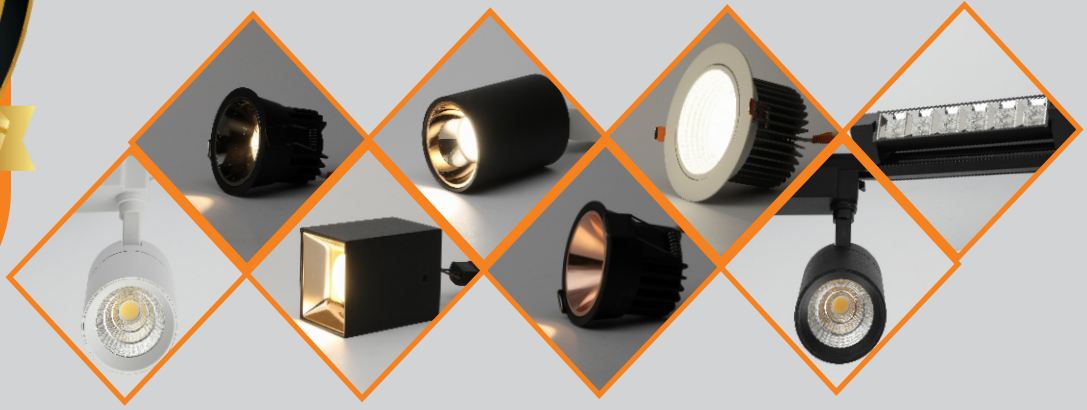

SMD | 120° Beam Angle | CERTIFIED | ENERGY SAVING | RoHS COMPLIANT | 20,000H LONG LIFE

HYLUM

LED LIGHTING

2 YEAR WARRANTY

S.NO.	CONTENT	Page No.
1.	TRACK & WALL LIGHT	3-5
2.	LINEAR TRACK	6
3.	COBS	7-10
4.	SURFACE CYLINDER	11-13
5.	MIRROR LIGHT	14-18
6.	BUTTONS / COIN LIGHT	19-20
7.	LINEAR LIGHT	21
8.	ADJ. PANEL & 2X2 PANNEL	22
9.	POP UP LIGHT & WALL WASHER	23
10.	FOOT LIGHT	24-26
11.	FLOOD LIGHT & LINEAR HANGING	27
12.	OUTDOOR LIGHTS	28-43
13.	POWER SUPPLY	44-46
14.	LED STRIP LIGHT	47-49
15.	MAGNETIC LIGHT	50-53
16.	PROFILE LIGHT	54-63



HYLUM
LED LIGHTING

Track & Wall Lights



bridgelux




03

HYLUM
LED LIGHTING

HY-4006A/TR








Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
10W 20W 30W	800Lm 1600Lm 2400Lm	≥0.95 ≥0.95 ≥0.95	Ø64xL118xH144mm Ø79xL138xH162mm Ø88xL158xH172mm	Warm White (3k) Neutral White (4k) White (6k)	PKW BK	15° 24° 36°

INPUT VOLTAGE : 100-380V

HY-4006A/SF (Wall Spot)








Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
10W 20W 30W	800Lm 1600Lm 2400Lm	≥0.95 ≥0.95 ≥0.95	Ø64xL118xH144mm Ø79xL138xH162mm Ø88xL158xH172mm	Warm White (3k) Neutral White (4k) White (6k)	PKW BK	15° 24° 36°

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING

HY-4006A/TR








Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
20W 30W 50W	800Lm 1600Lm 3200Lm	≥0.95 ≥0.95 ≥0.95	Ø64xL118xH144mm Ø79xL138xH162mm Ø98xL175xH195mm	Warm White (3k) Neutral White (4k) White (6k)	PKW BK	15° 24° 36°

INPUT VOLTAGE : 100-380V

HY-4006A/TR (Lens Model)







Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
10W 20W 30W	800Lm 1600Lm 2400Lm	≥0.95 ≥0.95 ≥0.95	Ø64xL118xH144mm Ø79xL138xH162mm Ø88xL158xH172mm	Warm White (3k) Neutral White (4k) White (6k)	PKW BK	15° 24° 36°


INPUT VOLTAGE : 100-380V

HyLight Your Venture !

HYLUM
LED LIGHTING

LINEAR TRACK (HY-333)








Power	PF	Dimension	Led Colour	Body Color	Beam Angle
12W 26W	≥0.95 ≥0.95	L214xW33xH57mm L346xW33xH57mm	Warm White (3k) Neutral White (4k)	BK	15° 24°
INPUT VOLTAGE : 100-380V					

LINEAR TRACK (HY-111)

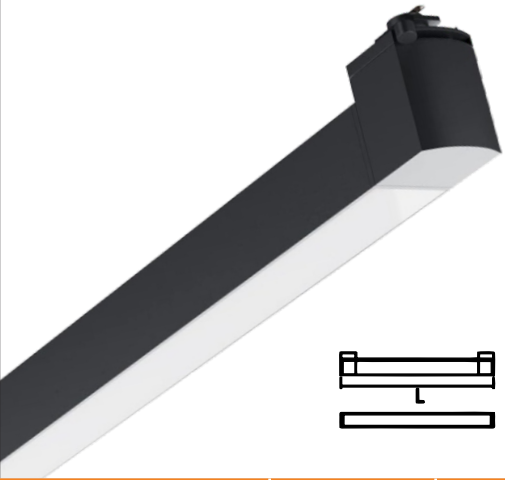





Power	PF	Dimension	Led Colour	Body Color	Beam Angle
12W 26W	≥0.95 ≥0.95	L214xW33xH57mm L346xW33xH57mm	Warm White (3k) Neutral White (4k)	BK	120°
INPUT VOLTAGE : 100-380V					

HYLUM
LED LIGHTING

COB

INDOOR SPOTLIGHT




bridgelux



07


HYLUM
LED LIGHTING

HY-2008A (Deep COB)

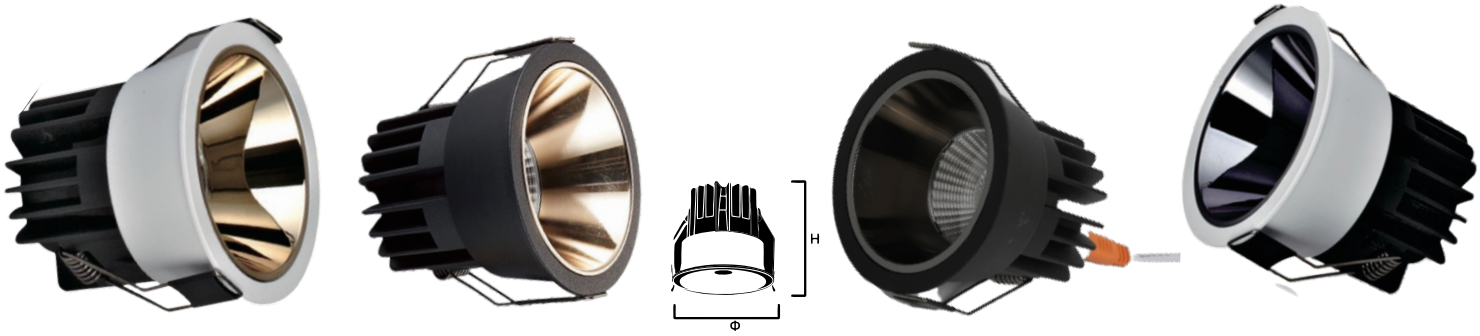

Model	Power	Input Voltage	Size (mm)	Cut Out (mm)	CCT	PF	Beam Angle
HY2008A	7W	100-380V	Ø65*H55	Ø58	3000K/4000K	Ra≥0.95	15°
HY2008A	12W	100-380V	Ø80*H75	Ø75	3000K/4000K	Ra≥0.95	24°
HY2008A	18W	100-380V	Ø95*H95	Ø85	3000K/4000K	Ra≥0.95	36°
Body Colour : PKW/GD, BK/GD, PKW/RG, BK/RG, BK/GBK, PKW/GBK							
INPUT VOLTAGE : 100-380V							

HY-2015 (Deep COB)

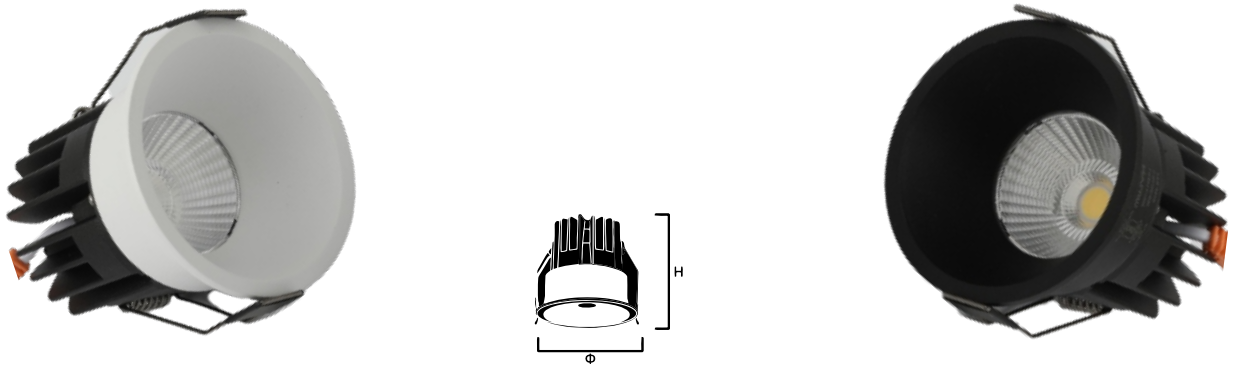


Model	Power	Input Voltage	Size (mm)	Cut Out (mm)	CCT	PF	Beam Angle
HY2015	7W	100-380V	Ø65*H55	Ø58	3000K/4000K	Ra≥0.95	15°
HY2015	12W	100-380V	Ø80*H75	Ø75	3000K/4000K	Ra≥0.95	24°
HY2015	18W	100-380V	Ø95*H95	Ø85	3000K/4000K	Ra≥0.95	36°
Body Colour : PKW, BK							
INPUT VOLTAGE : 100-380V							

HYLUM
LED LIGHTING

HY-2015A (Deep COB)








Model	Power	Input Voltage	Size (mm)	Cut Out (mm)	CCT	PF	Beam Angle
HY2015	7W	100-380V	Ø65*H55	Ø58	3000K/4000K	Ra≥0.95	15°
HY2015	12W	100-380V	Ø80*H75	Ø75	3000K/4000K	Ra≥0.95	24°

Body Colour : GD, RG, GBK

INPUT VOLTAGE : 100-380V

HY-2058 (Deep COB)








Model	Power	Input Voltage	Size (mm)	Cut Out (mm)	CCT	PF	Beam Angle
HY2058	7W	100-380V	Ø70*H55.5	Ø60	3000K/4000K	Ra≥0.95	15°
HY2058	12W	100-380V	Ø85*H65	Ø75	3000K/4000K	Ra≥0.95	24°
HY2058	18W	100-380V	Ø95*H74.5	Ø85	3000K/4000K	Ra≥0.95	36°


Body Colour : PKW/GD, BK/GD, PKW/RG, BK/RG, BK/GBK, PKW/GBK

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING

HY-635 (Tiltable COB)








Model	Power	Flux	Size (mm)	CCT	PF	Beam Angle
HY635	3W	255Lm	Ø65*H43	3000K/4000K/6500K	Ra≥0.95	36°/60°
HY635	7W	595Lm	Ø85*H60	3000K/4000K/6500K?	Ra≥0.95	36°/60°
HY635	12W	1020Lm	Ø85*H68	3000K/4000K/6500K	Ra≥0.95	36°/60°
HY635	18W	1530Lm	Ø108*H70	3000K/4000K/6500K	Ra≥0.95	36°/60°
HY635	24W	2040Lm	Ø120*H75	3000K/4000K/6500K	Ra≥0.95	36°/60°
HY635	30W	2550Lm	Ø160*H113	3000K/4000K/6500K	Ra≥0.95	36°/60°
HY635	50W	4250Lm	Ø160*H115	3000K/4000K/6500K	Ra≥0.95	36°/60°

INPUT VOLTAGE : 100-380V

HY-1004 (Deep Panel)







Model	Power	Input Voltage	Size (mm)	Cut Out (mm)	CCT	PF	Beam Angle
HY1004	12W	100-380V	Ø120*H50	Ø110	3000K/4000K/6500K	Ra≥0.95	120°
HY1004	18W	100-380V	Ø150*H50	Ø140	3000K/4000K/6500K	Ra≥0.95	

INPUT VOLTAGE : 100-380V

HyLight Your Venture !

HYLUM
LED LIGHTING

Surface Cylinder



bridgelux



11

HYLUM
LED LIGHTING

HY-2023 (Surface Cylinder)



Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W	400Lm	≥0.95	Ø55xH75mm	Warm White (3k) Neutral White (4k)	BK-GD BK-BK	24° 36° 45° 54°
12W	1000Lm	≥0.95	Ø73xH90mm			
20W	1600Lm	≥0.95	Ø95xH110mm			
30W	2400Lm	≥0.95	Ø115xH125mm			

INPUT VOLTAGE : 100-380V

HY-2057 (Surface Cylinder)



Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W	400Lm	≥0.95	Ø60xH70mm	Warm White (3k) Neutral White (4k)	BK	24° 36° 45°
12W	1000Lm	≥0.95	Ø75xH83mm			
20W	1600Lm	≥0.95	Ø83xH92mm			

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING

HY-1995 (Movable Surface Cylinder)





Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W	400Lm	≥0.95	Ø55xH75mm	Warm White (3k) Neutral White (4k)	BK	24° 36° 45°
12W	1000Lm	≥0.95	Ø73xH90mm			
18W	1600Lm	≥0.95	Ø95xH110mm			

Body Colour : PKW/GBK, PKW/GD

INPUT VOLTAGE : 100-380V

HY-1995 (Movable Surface Cylinder)





Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W	400Lm	≥0.95	Ø60xH70mm	Warm White (3k) Neutral White (4k)	BK	24° 36° 45°
12W	1000Lm	≥0.95	Ø75xH83mm			
18W	1600Lm	≥0.95	Ø83xH92mm			

Body Colour : PKW/GBK, PKW/GD

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING

Mirror Lights



bridgelux

HYLUM
LED LIGHTING

HY-666 (Mirror Light)



Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY666 HY666	12W 18W	100-380V 100-380V	320MM 550MM (Rectangle)	3C 3C	Ra≥0.95 Ra≥0.95	120°
INPUT VOLTAGE : 100-380V						

HY-555 (Mirror Light)



Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY666 HY666	12W 18W	100-380V 100-380V	320MM 550MM (Rectangle)	3C 3C	Ra≥0.95 Ra≥0.95	120°
INPUT VOLTAGE : 100-380V						

HYLUM
LED LIGHTING

BK-RG



Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY2206	6W	100-380V	320MM	3C	Ra≥0.95	120°
HY2212	12W	100-380V	550MM (Rectangle)	3C	Ra≥0.95	
INPUT VOLTAGE : 100-380V						


PKW-RG



Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY2206	6W	100-380V	320MM	3C	Ra≥0.95	120°
HY2212	12W	100-380V	550MM (Rectangle)	3C	Ra≥0.95	
INPUT VOLTAGE : 100-380V						

HYLUM
LED LIGHTING

GD

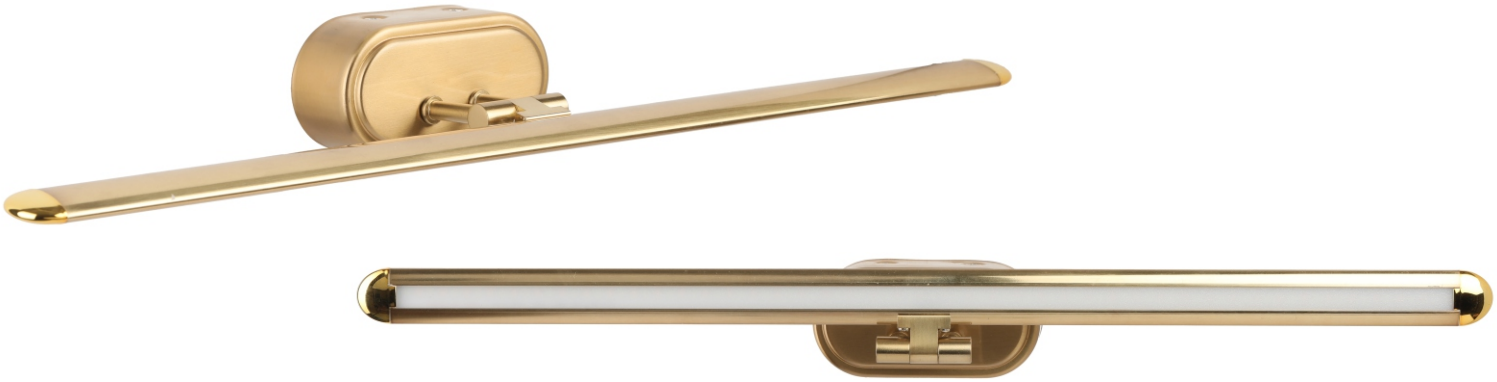

Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY2206	6W	100-380V	320MM	3C	Ra≥0.95	120°
HY2212	12W	100-380V	550MM (Rectangle)	3C	Ra≥0.95	

INPUT VOLTAGE : 100-380V

RG



Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY2206	6W	100-380V	320MM	3C	Ra≥0.95	120°
HY2212	12W	100-380V	550MM (Rectangle)	3C	Ra≥0.95	

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING

AB





Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY2206	6W	100-380V	320MM	3C	Ra≥0.95	120°
HY2212	12W	100-380V	550MM (Rectangle)	3C	Ra≥0.95	

INPUT VOLTAGE : 100-380V

WD





Model	Power	Input Voltage	Size (mm)	CCT	PF	Beam Angle
HY2206	6W	100-380V	320MM	3C	Ra≥0.95	120°
HY2212	12W	100-380V	550MM (Rectangle)	3C	Ra≥0.95	

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING

HY-3019A



Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
2W 3W	180Lm 270Lm	≥0.60 ≥0.60	Ø45xH32mm Ø55xH45mm	Warm White (3k)	BK-RG	38° 45°
INPUT VOLTAGE : 100-380V						


HY-3001A



Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W	270Lm	≥0.60	Ø55xH45mm	Warm White (3k)	BK-RG	45°
INPUT VOLTAGE : 100-380V						

HYLUM
LED LIGHTING

HY-3001B

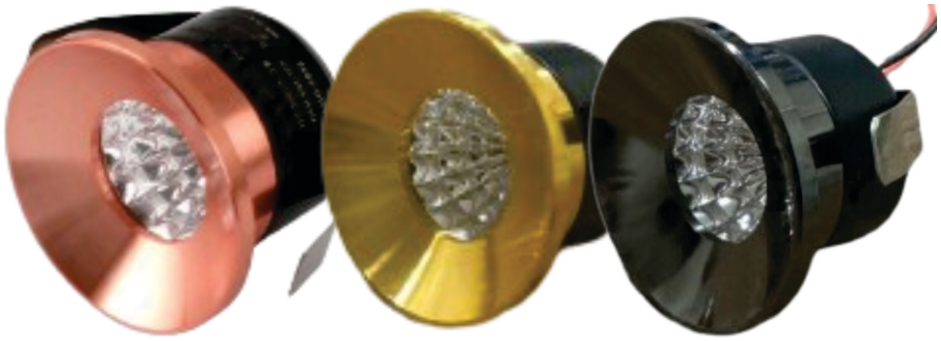

Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W	270Lm	≥0.60	Ø55xH45mm	Warm White (3k)	BK-RG	45°
INPUT VOLTAGE : 100-380V						

HY-3006





Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W	270Lm	≥0.60	Ø55xH45mm	Warm White (3k)	BK-RG	45°
INPUT VOLTAGE : 100-380V						

HYLUM
LED LIGHTING

HY-2062





Power	PF	Dimension	Led Colour	Body Color	Cut Out (mm)
4W	≥0.85	L68.5xW45xH38mm	3000K/4000K	BK-BK BK-PKW BK-RG	L58xW35
6W	≥0.85	L95xW45xH38mm			L88xW35
10W	≥0.85	L147.5xW45xH38mm			L140xW35
20W	≥0.85	L280xW45xH38mm			L280xW35
INPUT VOLTAGE : 100-380V					

HY-2062-SF




Power	PF	Dimension	Led Colour	Body Color	Cut Out (mm)
4W	≥0.85	L68.5xW45xH38mm	3000K/4000K	BK-BK BK-PKW BK-RG	L58xW35
6W	≥0.85	L95xW45xH38mm			L88xW35
10W	≥0.85	L147.5xW45xH38mm			L140xW35
20W	≥0.85	L280xW45xH38mm			L280xW35
INPUT VOLTAGE : 100-380V					

HYLUM
LED LIGHTING

HY-1005 (Adj. Panel)



Power	Flux	PF	Cut Out	Led Colour	Body Color	Dimension
18W 24W 36W	1800Lm 2400Lm 3600Lm	≥0.68 ≥0.68 ≥0.95	Ø40x108mm Ø70x160mm Ø80x210mm	3K, 4K, 6K	PKW	Ø120xH30mm Ø170xH30mm Ø225xH30mm
INPUT VOLTAGE : 90-280V						

2x2 Panel



Power	PF	Dimension	Led Colour	Body Color	Body Type
48W	≥0.95	595x595mm	3000K/4000K/6500K	PKW	Bakelite
INPUT VOLTAGE : 100-380V					

HYLUM
LED LIGHTING

HY-2060





Power	PF	Input Voltage	Led Colour	Body Color	Cut Out (mm)
12W	≥0.95	100-380V	3000K/4000K	BK/PKW	Ø58
INPUT VOLTAGE : 100-380V					

HY-3107




Product Feature

Compact & Minimilist linear surface mounted luminaire designed for wall, ceiling & floor mount application. Ideal light distribution serves both wall washing & wall grazing applications. Luminaire made up of extruded aluminium alloy and flush end caps with silicone gasket

Power	Flux	PF	Size	IP Rating	Led Colour	Body Color	Beam Angle
18W 36W	520Lm 1460Lm	≥0.95 ≥0.95	0.5 mtr 1 mtr	IP67	WW/RGB	/	180° 180°
INPUT VOLTAGE : 90-280V							

HYLUM
LED LIGHTING

Foot Light

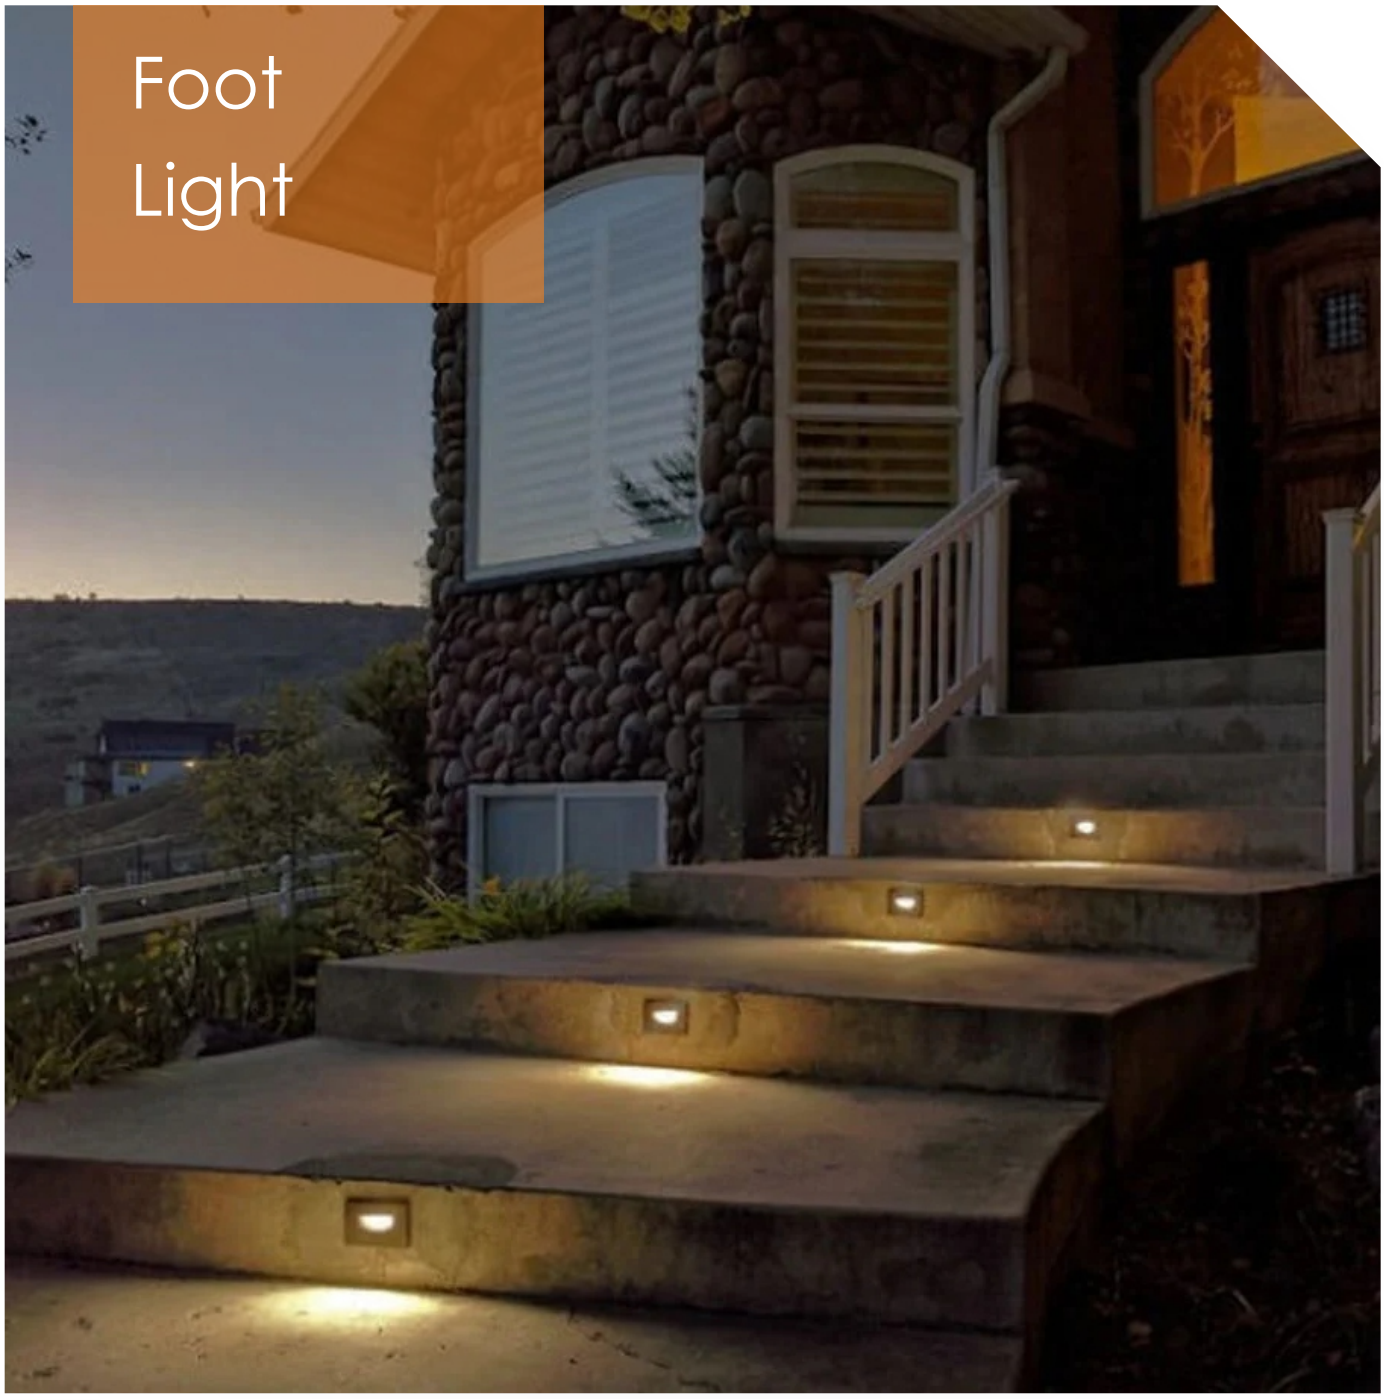

bridgelux



HYLUM
LED LIGHTING

HY-0703/05





Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W 5W	240Lm 380Lm	≥0.95 ≥0.95	Ø86x86x30mm Ø107x86x30mm	Warm White (3k)	BK & PKW	/ /
INPUT VOLTAGE : 90-280V						

HY-0703/05 SS (Sensor)





Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W 5W	240Lm 380Lm	≥0.95 ≥0.95	Ø86x86x30mm Ø107x86x30mm	Warm White (3k)	BK & PKW	/ /
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-1003/03SS (Foot Light)



Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W	240Lm	≥0.95	Ø49x45x185mm	Warm White (3k)	BK	/
INPUT VOLTAGE : 90-280V						

HY-2103/05 (Surface Foot Light)



Product Feature

A footlight is a light that illuminates from foot level, and can refer to a lighting device in a theater or a basic lighting tool in a home

Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
3W 5W	160Lm 320Lm	≥0.95 ≥0.95	Ø70x42x92mm Ø70x42x150mm	Warm White (3k)	BK	90° 90°
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-2308 (Flood Light)





Power	Flux	PF	Led Colour	IP Rating	Beam Angle
50W	4500Lm	≥0.95	White (6k) Warm White (3k)	65	120°
100W	9000Lm	≥0.95		65	120°
200W	18000Lm	≥0.95		65	120°

INPUT VOLTAGE : 90-280V

Linear Hanging






Power	Flux	PF	Led Colour	Input Voltage	Beam Angle
45W	4500Lm	≥0.95	White (6k) Warm White (3k) Natural White (4k) Tri Color (3c)	100-380V	120°

INPUT VOLTAGE : 90-280V

HYLUM
LED LIGHTING

OUTDOOR LIGHT

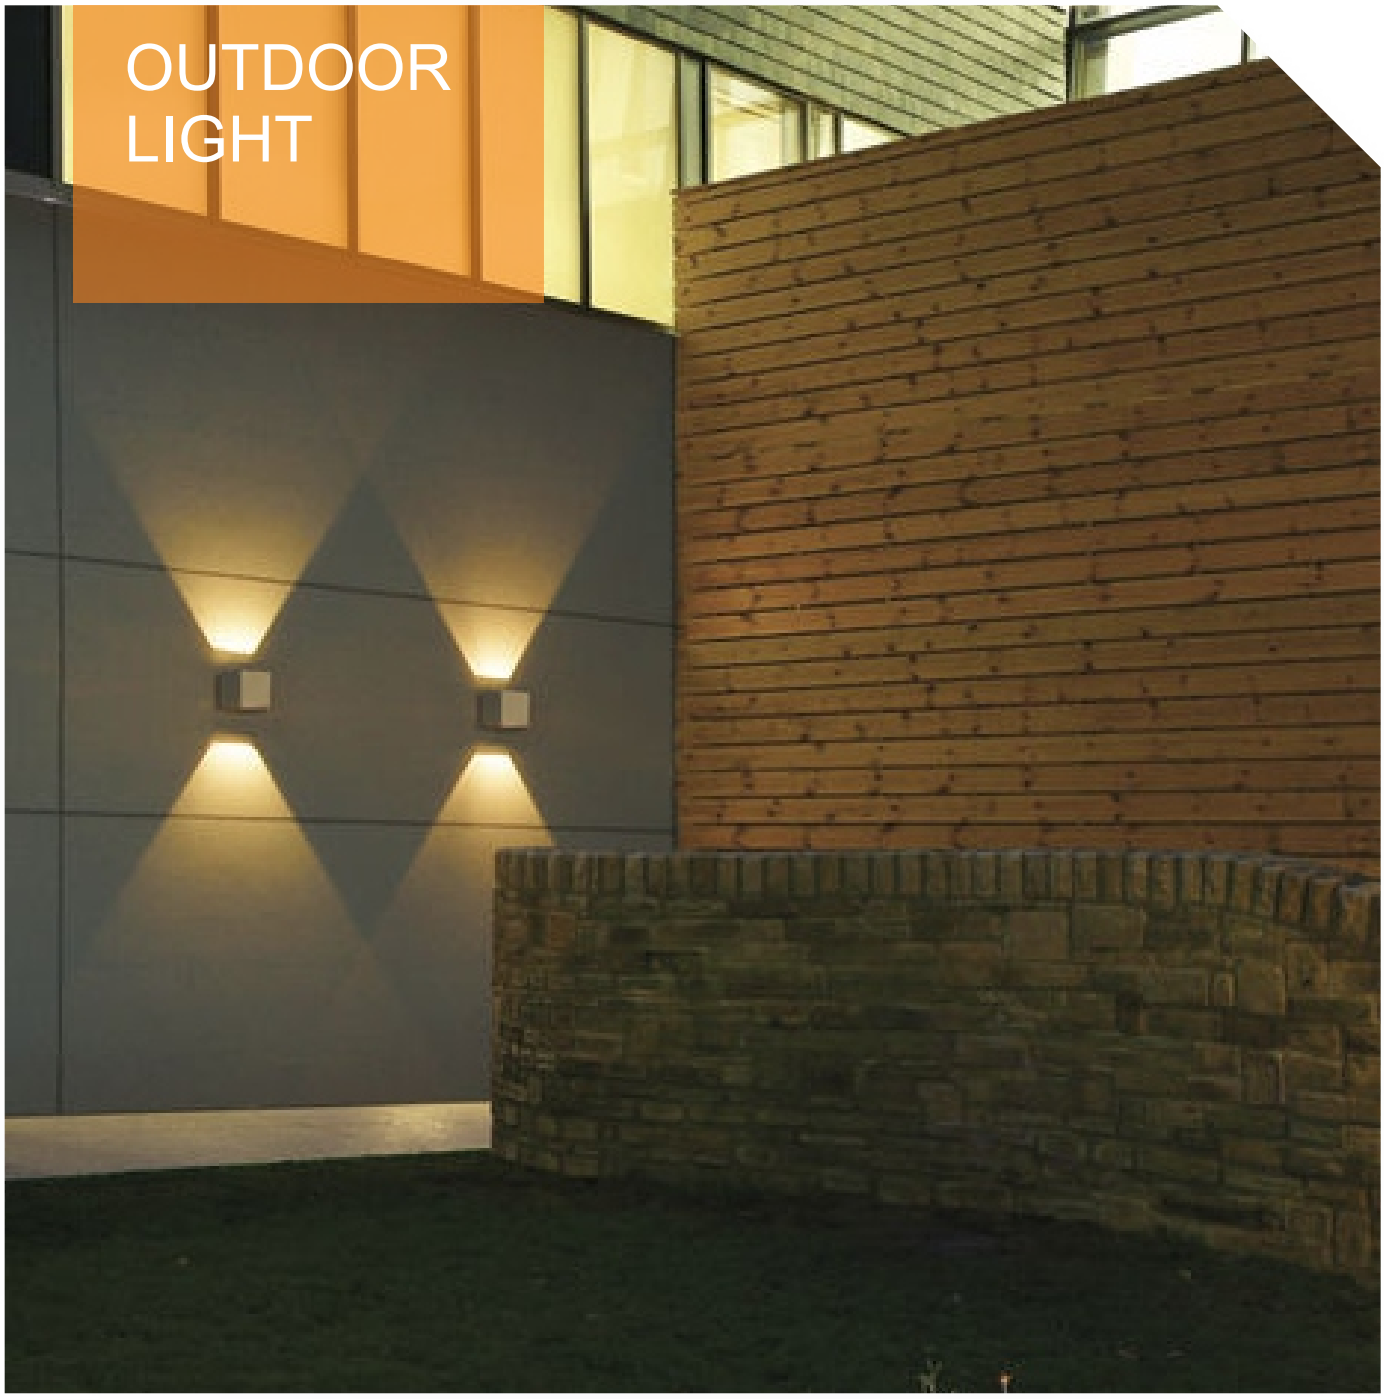

bridgelux



HYLUM
LED LIGHTING

HY-2507/15/20 (Water Proof Surface Cyclinder)

Product Feature

Designed to seamlessly blend into any space, this sleek panel delivers a crisp and natural white light, enhancing clarity and ambiance.With its energy-efficient design, it illuminates your surroundings while minimizing power consumption.



Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W	630Lm	≥0.95	Ø60x61mm	Warm White (3k)	BK	24°/38°
15W	1080Lm	≥0.95	Ø75x75mm			24°/38°
20W	1620Lm	≥0.95	Ø90x90mm			24°/38°
INPUT VOLTAGE : 90-280V						

HY-0207/15



Product Feature

This 600 lumen warm white outdoor garden light can be used to illuminate sculptures, decorative wall panels, garden buildings, and structures. Our waterproof outside lights is creating a warming atmosphere.

Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W	480Lm	≥0.95	Ø100x100x77x131mm	Warm White (3k)	BK	36°
15W	960Lm	≥0.95	Ø135x135x93x173mm			36°
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-1715

Product Feature

Garden spike lights by Hylum are a popular and stylish way to illuminate outdoor spaces.



Power	PF	Input Voltage	Led Colour	Body Color	Body Type
15W	≥0.95	100-380V	WW/RGB	BK	Aluminium
INPUT VOLTAGE : 90-280V					

HY-2707/12X





Power	PF	Input Voltage	Flux	Led Colour	Dimension	Beem Angle
7W	≥0.95	90-280V	525LM	WW	Ø37x102x262mm	12°/24°/36°
15W	≥0.95	90-280V	900LM	WW	Ø52x125x277mm	12°/24°/36°
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-2207/15/20





Power	PF	Input Voltage	Flux	Led Colour	Dimension	Beem Angle
7W	≥0.95	90-280V	525LM	WW	Ø70x267mm	24°/38°
15W	≥0.95	90-280V	900LM	WW	Ø90x287mm	24°/38°
20W	≥0.95	90-280V	1125LM	WW	Ø90x287mm	24°/38°
INPUT VOLTAGE : 100-380V						

HY-1307/15X



Product Feature

Robust built and durable quality; · Dust-proof and water resistant; · Perfect for use in garden, patio; · 36 degree beam angle to ensure spread of light

Power	PF	Input Voltage	Flux	Led Colour	Dimension	Beem Angle
7W	≥0.95	90-280V	560LM	WW	Ø64x130x160mm	36°
15W	≥0.95	90-280V	960LM	WW	Ø64x130x160mm	36°
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-0107R/15R





Power	Flux	PF	Dimension	Led Colour	Body Color	Beam Angle
7W 15W	480Lm 960Lm	≥0.95 ≥0.95	Ø63x83x88mm Ø83x97x111mm	WW	BK	36° 36°
INPUT VOLTAGE : 90-280V						

HY-0203/06/12





Power	PF	Input Voltage	Flux	Led Colour	Body Colour	Beem Angle
3W	≥0.95	90-280V	270LM	WW	BK	24°
6W	≥0.95	90-280V	540LM	WW/RGB	BK	36°
12W	≥0.95	90-280V	1080LM	WW/RGB	BK	38°
INPUT VOLTAGE : 100-380V						

HYLUM
LED LIGHTING

HY-0903R

CREE LED

Product Feature

A light that is installed in the ground and is used to illuminate walls, pillars, trees, and other areas



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
3W	270Lm	≥0.95	Ø45x75mm	Warm White (3k)	AL	IP65

HY-0306/12

CREE LED



Product Feature

Elegantly designed epoxy powder coated
Aluminum pressure die casting

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
6W 12W	480Lm 960Lm	≥0.95 ≥0.95	Ø85x97mm Ø110x112mm	Warm White (3k)	AL	IP65

HY-0903R

CREE LED

Product Feature

Ideal designed for rough outdoor environment and offer consistency in performance with unique design ensure uniform distribution of light on outdoor environment.



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
3W 6W 12W	270Lm 480Lm 960Lm	≥0.95 ≥0.95 ≥0.95	Ø65x75mm Ø80x75mm Ø99x75mm	Warm White (3k)	AL	IP65

INPUT VOLTAGE : 90-280V

HYLUM
LED LIGHTING

HY-2503X/06X





Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
3W 3W*2	240Lm 480Lm	≥0.95 ≥0.95	Ø81x76x63mm Ø81x140x63mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HY-3610





Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
5W*2	800Lm	≥0.95	Ø80X132X96X105mm	Warm White (3k)	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-4100X





Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
1W	80Lm	≥0.95	76x37x77mm	WW RGB (Auto Functional)	BK	IP65
1W*2	160Lm	≥0.95	76x37x77mm			
1W*4	320Lm	≥0.95	117x37x80mm			
1W*6	480Lm	≥0.95	167x40x80mm			
1W*8	640Lm	≥0.95	220x45x80mm			
INPUT VOLTAGE : 90-280V						

HY-4212/16



Product Feature

This dual-output outdoor wall light. Emitting bright warm light from below and above the unit, this contemporary piece is symmetrically adorned with frayed

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
5W*2	960Lm	≥0.95	114x28x90mm	WW	BK	IP65
7W*2	1280Lm	≥0.95	174x28x90mm			
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-2012X

Product Feature

A 4-way light is a light that can be directed up, down, or across in multiple directions.
They can be used for a variety of purposes, including landscape lighting, entryway lighting, and pathway lighting.



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
3W*4	960Lm	≥0.95	100x100x51mm	Warm White (3k)	BK	IP65
INPUT VOLTAGE : 90-280V						

HY-4402X/04X/12X



Product Feature

4-way lights can be made of a variety of materials, including aluminum an metal, and can be used both indoors and outdoors.

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
1W*2	160Lm	≥0.95	70x70x51mm	WW	BK	IP65
1W*4	320Lm	≥0.95	70x70x51mm	RGB		
3W*4	960Lm	≥0.95	90x90x50mm	(Auto Functional)		
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-0906

Product Feature

Installation Location: not only perfect for lighting but also perfect for decoration purpose, in living room, bedroom, hallways, stairwells, restaurants, hotels, motels, shop, porch, office, bars, or other indoor outdoor lighting occasions.



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
6W	480Lm	≥0.95	70x70x53mm	Warm White (3k)	BK	IP65
INPUT VOLTAGE : 90-280V						

HY-4006




Product Feature

Please notice: Indoor use only and for the decoration of wall, they can't be the main light source.

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
6W	480Lm	≥0.95	120x60x40mm	Warm White (3k)	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-7012

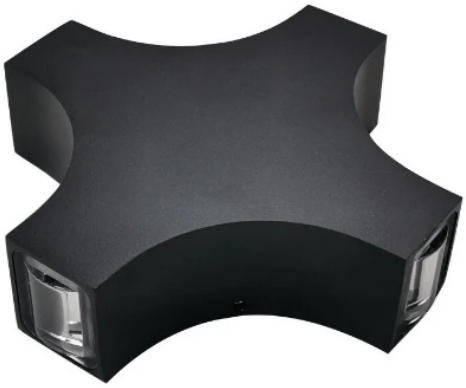

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
3W*4	960Lm	≥0.95	170x170x40mm	WW, RGB (Auto Functional)	BK	IP65
INPUT VOLTAGE : 90-280V						

HY-5118



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
6W	540Lm	≥0.95	124x62mm	WW, RGB (Auto Functional)	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-5810/18



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
5W*2 9W*2	800Lm 1440Lm	≥0.95 ≥0.95	150x170x60mm 80x200mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HY-6705/10






Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
5W 10W	400Lm 800Lm	≥0.95 ≥0.95	80X95X81mm 80x190X81mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-8812

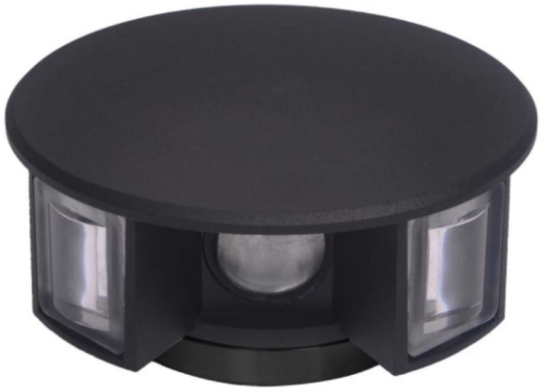

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
12W	960Lm	≥0.95	120x55mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HY-9208



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
8W	600Lm	≥0.95	60x200x45mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-0506



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
6W	480Lm	≥0.95	220x72x90mm	WW	BK-GD	IP65
INPUT VOLTAGE : 90-280V						

HY-0704R



Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
4W	320Lm	≥0.95	95x45x58mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-3106






Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
6W	480Lm	≥0.95	50x45x160mm	WW	BK/GD	IP65
INPUT VOLTAGE : 90-280V						

HY-5710



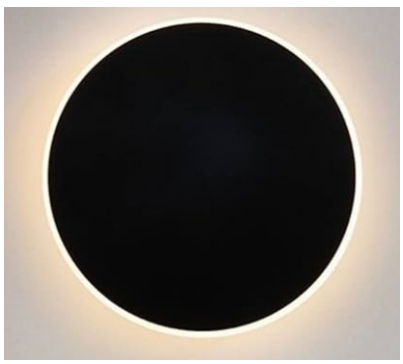


Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
10W	800Lm	≥0.95	166x38mm	WW	BK	IP65
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

HY-3403



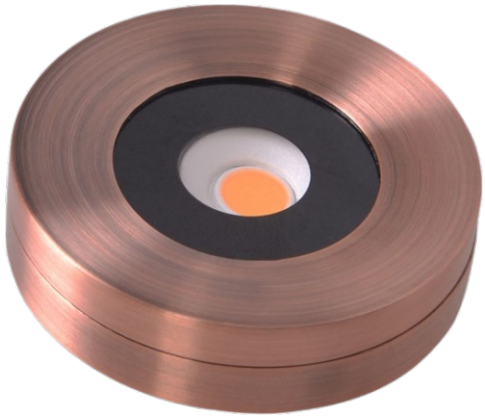

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
3W	270Lm	≥0.95	60x15mm	WW	BK/RG/AB	IP65
INPUT VOLTAGE : 90-280V						

HY-5710



Product Feature

Cabinet lighting is the process of installing lights in cabinets and on shelves to highlight areas, increase visibility, and make tasks easier

Power	Flux	PF	Dimension	Led Colour	Body Color	IP Rating
5W	400Lm	≥0.95	1 ft	3K/4K/6K	PKW	IP20
10W	800Lm	≥0.95	2 ft			
15W	1200Lm	≥0.95	3 ft			
20W	1600Lm	≥0.95	4 ft			
INPUT VOLTAGE : 90-280V						

HYLUM
LED LIGHTING

Power Supply



bridgelux

HYLUM
LED LIGHTING

Ultra Slim





Power	Input Voltage	Output Current
5 AMP	12V	60W
10 AMP	12V	120W
16.7 AMP	12V	200W
25 AMP	12V	300W
33.3 AMP	12V	400W

Heavy




Power	Input Voltage	Output Current
2 AMP	12V	24W
3 AMP	12V	36W
5 AMP	12V	60W
10 AMP	12V	120W
16.7 AMP	12V	200W
25 AMP	12V	300W
33.3 AMP	12V	400W

HYLUM
LED LIGHTING

Pencil Driver



Power	Input Voltage	Output Current
2 AMP	12V	24W
3 AMP	12V	36W
5 AMP	12V	60W
10 AMP	12V	120W

Rain Proof Driver



Power	Input Voltage	Output Current
33.3 AMP	12V	400W

24V-Heavy



Power	Input Voltage	Output Current
2.5 AMP	24V	60W
5 AMP	24V	120W
10 AMP	24V	240W
16.7AMP	24V	400W
25 AMP	24V	600W
33.3 AMP	24V	800W
41 AMP	24V	984W

HYLUM
LED LIGHTING

Led
Strip Light



bridgelux

HYLUM
LED LIGHTING

Led Strip Light (2yrs Warranty)






Led	SMD	IP Rating	PCB	Led Colour
120L	2835	IP20	8mm	3k, 4k, 6k
240L	2835	IP20	10mm	3k, 4k, 6k

INPUT VOLTAGE : 100-380V

Led Strip Light-5mm (2yrs Warranty)

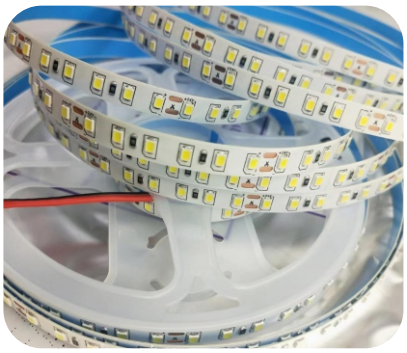




Led	SMD	IP Rating	PCB	Led Colour
120L	2835	IP20	5mm	3k, 4k, 6k
180L	2835	IP20	5mm	3k, 4k, 6k
240L	2835	IP20	5mm	3k, 4k, 6k

INPUT VOLTAGE : 100-380V

HYLUM
LED LIGHTING


Led Strip Light (Water Proof)

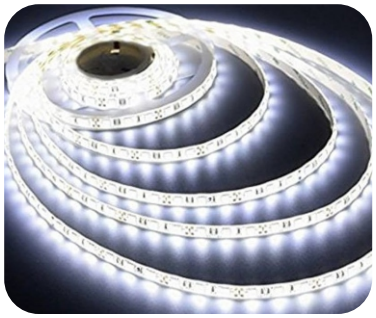




Led	SMD	IP Rating	PCB	Led Colour
120L	2835	IP20	8mm	3k, 4k, 6k
240L	2835	IP20	10mm	3k, 4k, 6k
INPUT VOLTAGE : 100-380V				

Led Strip Light (24V)

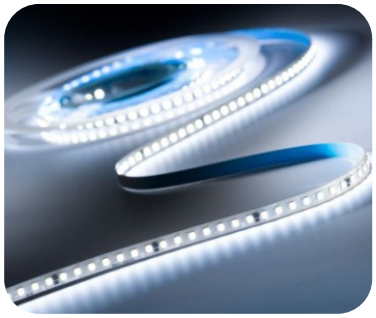

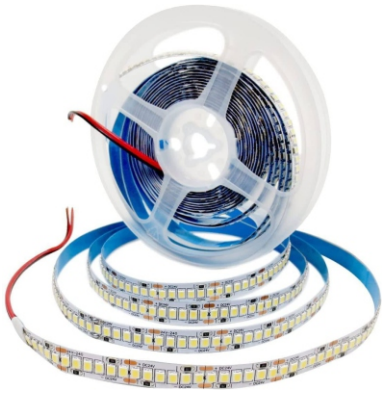

Led	SMD	IP Rating	PCB	Led Colour
120L	2835	IP20	8mm	3k, 4k, 6k
240L	2835	IP20	10mm	3k, 4k, 6k
INPUT VOLTAGE : 100-380V				

HYLUM
LED LIGHTING

Megnetic Lights




bridgelux

HYLUM
LED LIGHTING

HY-20 Profile







Model	Power	Size (mm)	CCT	PF	Beam Angle
		(H45 Including Power Supply)			
HY20PROFILE	10W	L300*W23*H45	3000K/4000K	Ra≥0.95	120°
HY20PROFILE	20W	L600*W23*H45	3000K/4000K	Ra≥0.95	120°
HY20PROFILE	30W	L900*W23*H45	3000K/4000K	Ra≥0.95	120°
INPUT VOLTAGE : 48V					

HY-20 Linear






Model	Power	Size (mm)	CCT	PF	Beam Angle
		(H45 Including Power Supply)			
HY20PROFILE	6W	L112*W23*H45	3000K/4000K	Ra≥0.95	15°
HY20PROFILE	12W	L220*W23*H45	3000K/4000K	Ra≥0.95	24°
HY20PROFILE	18W	L328*W23*H45	3000K/4000K	Ra≥0.95	36°
INPUT VOLTAGE : 48V					

HYLUM
LED LIGHTING

HY-20 Folding








Model	Power	Size (mm) (H45 Including Power Supply)	CCT	PF	Beam Angle
HY20FOLDING	6W	L110*W23*H130	3000K/4000K	Ra≥0.95	15°
HY20FOLDING	12W	L220*W23*H130	3000K/4000K	Ra≥0.95	24°
INPUT VOLTAGE : 48V					

HY-20 Track











Model	Power	Size (mm) (H45 Including Power Supply)	CCT	PF	Beam Angle
HY20TRACK	10W	W47*H174	3000K/4000K	Ra≥0.95	15°
HY20TRACK	20W	W67*H193	3000K/4000K	Ra≥0.95	24°
HY20TRACK	30W	W76*H224	3000K/4000K	Ra≥0.95	36°
INPUT VOLTAGE : 48V					

HYLUM
LED LIGHTING

Magnetic Spares





Trackway-1m, 2m, 3m (Recessed & Surface)



Power Supply



Jointer (I & L)



Roof L



Hanging Chain 1m


HYLUM

LED LIGHTING

HyLight Your Venture!


Aluminium Profile Light



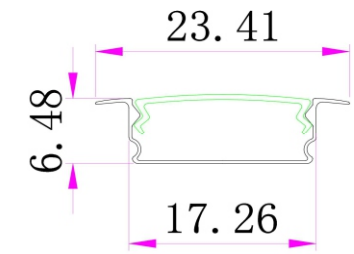




(17x6 MM)
Concealed

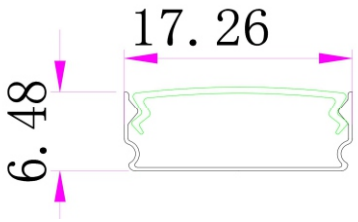





(17x6 MM)
Surface

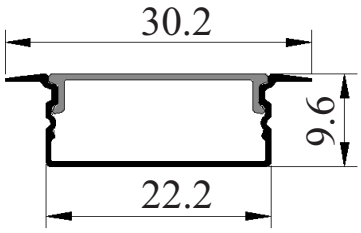





(25x10 MM)
Concealed

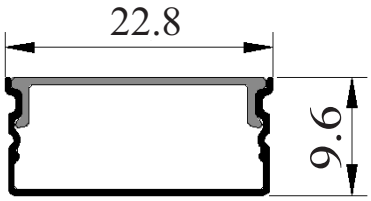

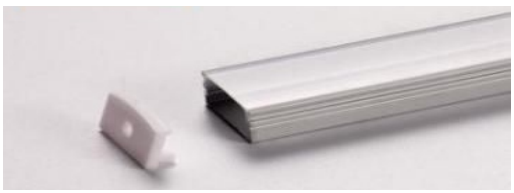



(25x10 MM)
Surface

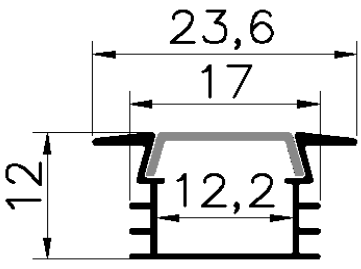








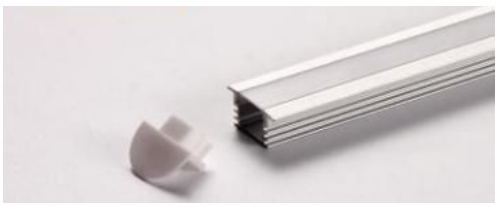



(17x12 MM)
Concealed

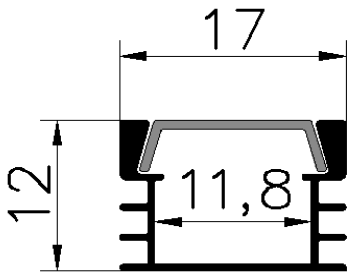


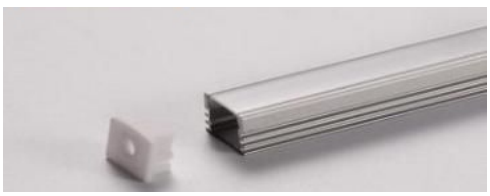


(17x12 MM)
Surface

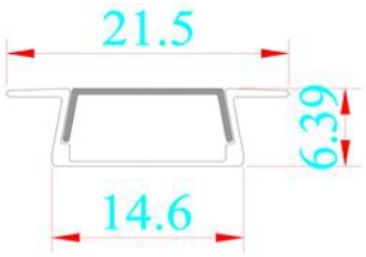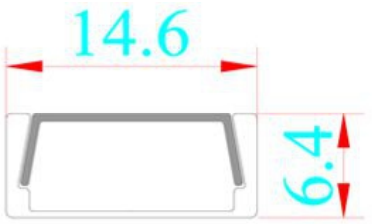		(15x6 MM) **Concealed**
		(15x6 MM) **Surface**
		(11x6 MM) **Concealed**
		(11x6 MM) **Surface**
		(14x8 MM) **Concealed**
		(14x8 MM) **Surface**

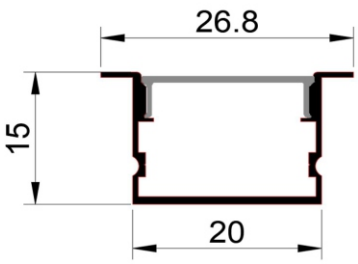





(20x15 MM)
Concealed







(20x15 MM)
Surface



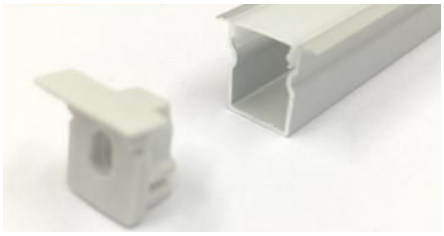


(10x13 MM)
Concealed



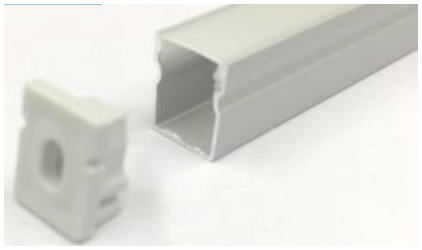


(10x13 MM)
Surface














(8x9 MM)
Concealed







(8x9 MM)
Surface

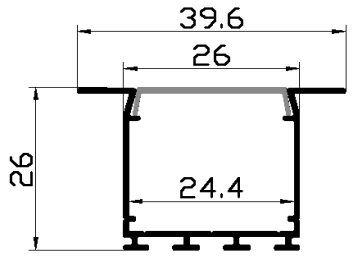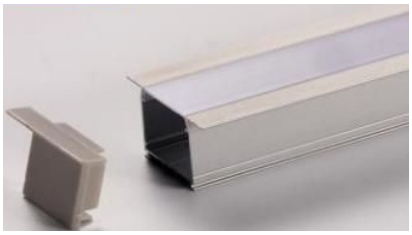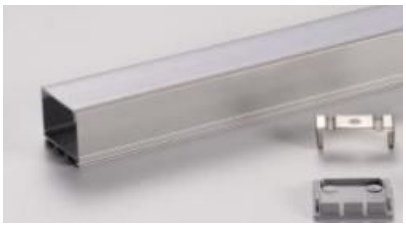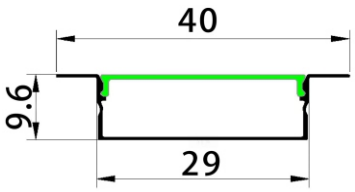		(26x26 MM) **Concealed**
		(26x26 MM) **Surface**
		(30x10 MM) **Concealed**
		(30x10 MM) **Surface**
		(35x12 MM) **Concealed**
		(35x12 MM) **Surface**

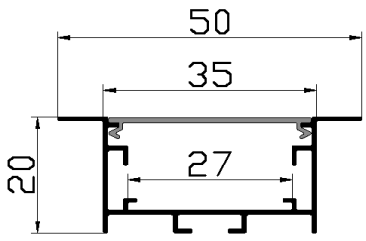

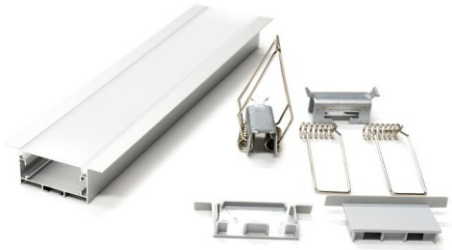


(35x20 MM)
Concealed






(35x20 MM)
Surface






(35x35 MM)
Concealed






(35x35 MM)
Surface

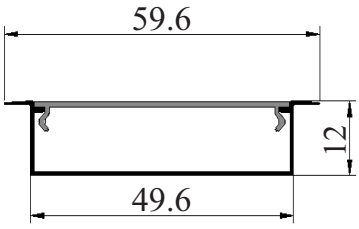













(50x12 MM)
Concealed

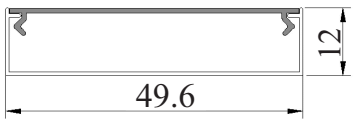




(50x12 MM)
Surface

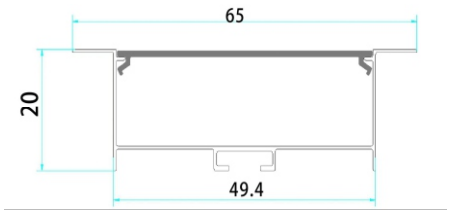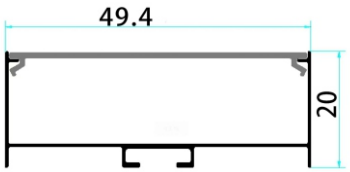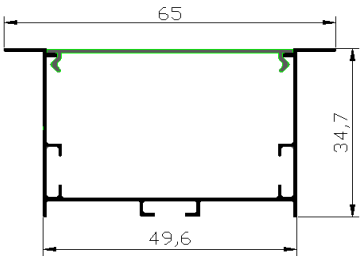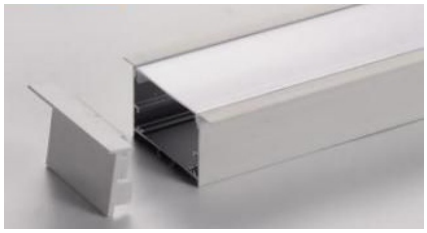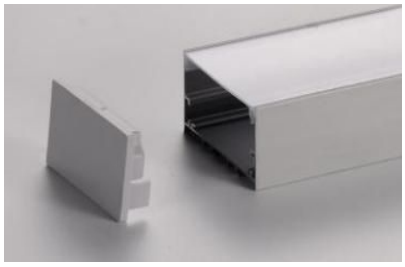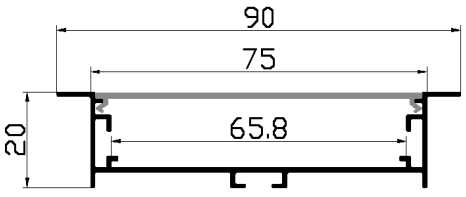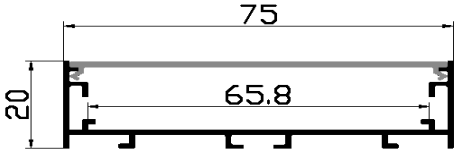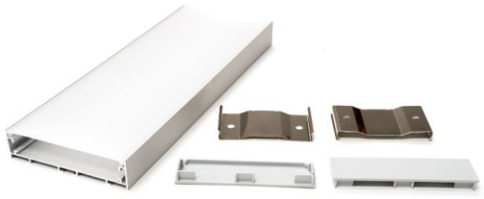		(50x20 MM) **Concealed**
		(50x20 MM) **Surface**
		(50x35 MM) **Concealed**
		(50x35 MM) **Surface**
		(75x20 MM) **Concealed**
		(75x20 MM) **Surface**







(16x16 MM)
Corner

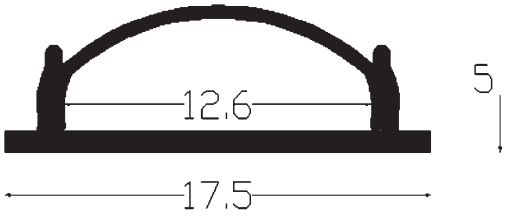





(18x6 MM)
Bendable

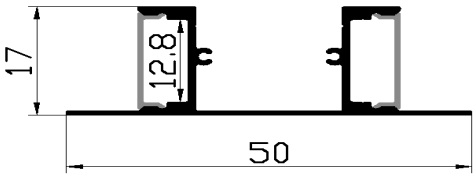

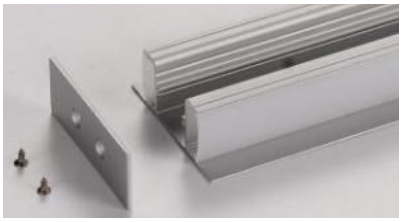



(50x15 MM)

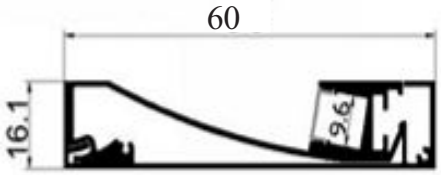

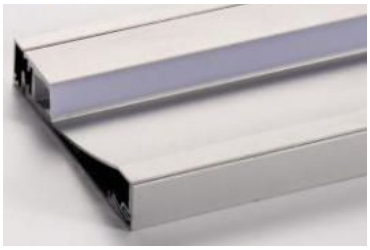



(60x16 MM)

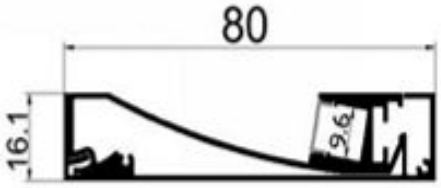






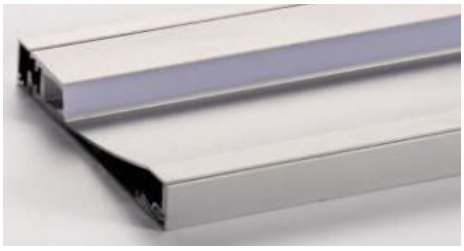












(80x16 MM)





(68x68 MM)

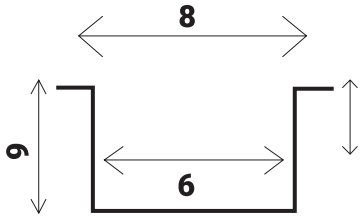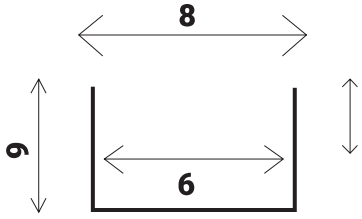		(17x6 MM) **Concealed**
		(17x6 MM) **Surface**
		(25x10 MM) **Concealed**
		(25x10 MM) **Surface**
		(8x9 MM) **Concealed**
		(8x9 MM) **Surface**

		(16x16 MM) **Corner**
		(50x70 MM) **Bendable**
		(10x10 MM) **Surface**
		(12x12 MM) **Surface & Concealed**
		(16x16 MM) **Surface & Concealed**
		(25x17 MM) **Surface**
		(20x14 MM) **Surface**

HYLUM

LED LIGHTING

As an auxiliary light source, it can decorate space and create atmosphere at the same time



HyLight Your Venture!